


# 1N5817 THRU 1N5819



1.0 AMP SCHOTTKY BARRIER RECTIFIERS



## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.28 grams
- \* Lead Free Finish/RoHS Compliant


## VOLTAGE RANGE

20 to 40 Volts

## CURRENT

1.0 Ampere

DO-41

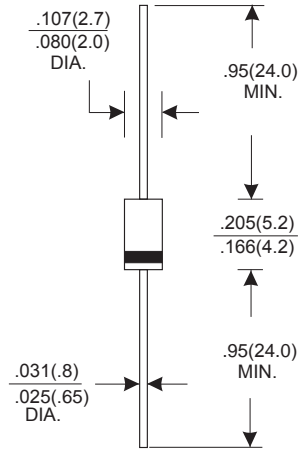

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER  | 1N5817     | 1N5818 | 1N5819 | UNITS |
|--|------------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage   | 20         | 30     | 40     | V     |
| Maximum RMS Voltage  | 14         | 21     | 28     | V     |
| Maximum DC Blocking Voltage  | 20         | 30     | 40     | V     |
| Maximum Average Forward Rectified Current  |            |        |        |       |
| .375"(9.5mm) Lead Length at Ta=90°C  | 1.0        |        |        | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 25         |        |        | A     |
| Maximum Instantaneous Forward Voltage at 1.0A  | 0.45       | 0.55   | 0.60   | V     |
| Maximum DC Reverse Current Ta=25°C   | 500        |        |        | uA    |
| at Rated DC Blocking Voltage Ta=100°C  | 10         |        |        | mA    |
| Typical Junction Capacitance (Note1)   | 110        |        |        | pF    |
| Typical Thermal Resistance RθJA (Note 2)   | 80         |        |        | °C/W  |
| Operating Temperature Range Tj   | -65 — +125 |        |        | °C    |
| Storage Temperature Range Tstg   | -65 — +150 |        |        | °C    |

### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

## RATING AND CHARACTERISTIC CURVES (1N5817 THRU 1N5819)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

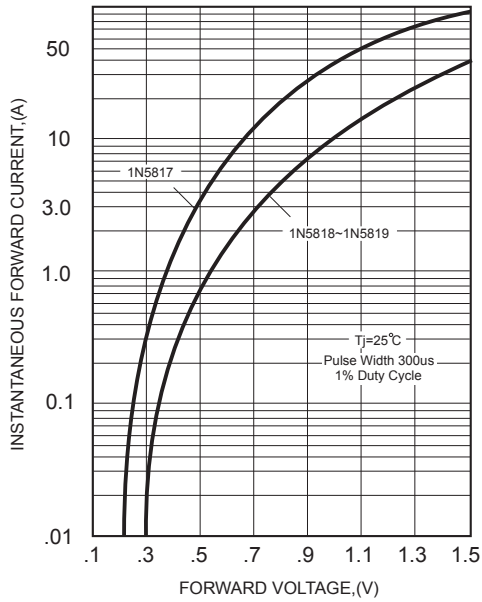


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

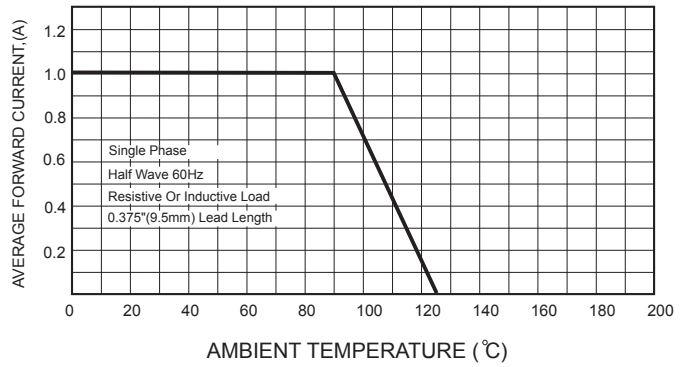


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

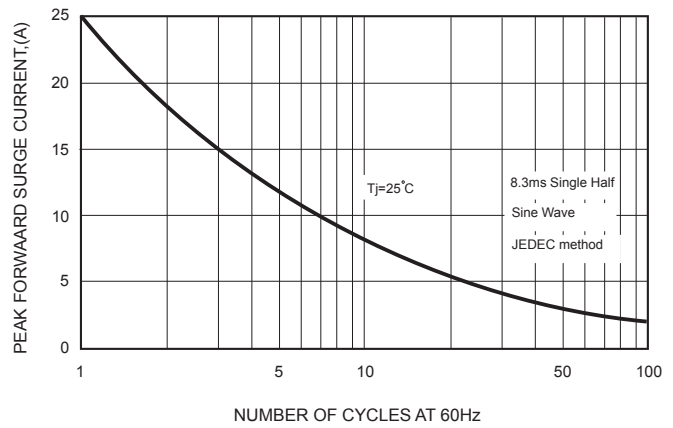


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

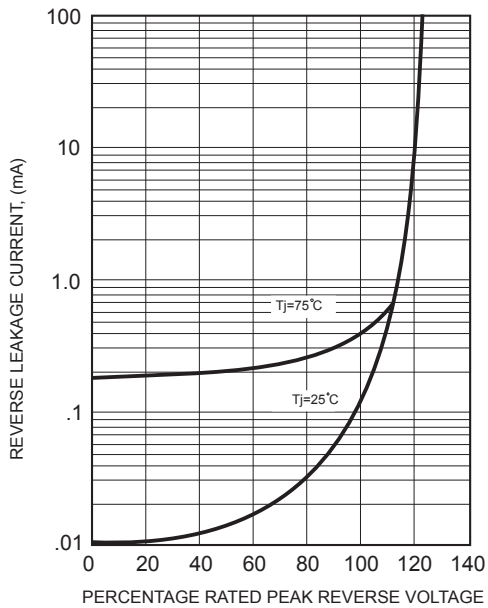


FIG.5-TYPICAL JUNCTION CAPACITANCE

