

SS24L THRU SS26L

Surface Mount Schottky Barrier Rectifier
Reverse Voltage - 40 and 60 V
Forward Current - 2.0A

I_O

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Lead free Finish/ROHS Compliant

MECHANICAL DATA

- Case: SMAFL molded plastic body
- Weight 0.064gram
- Terminals: Solderable per MIL-STD-750, Method 2026


VOLTAGE RANGE

40 to 60 Volts

CURRENT

2.0 Ampere

SMA

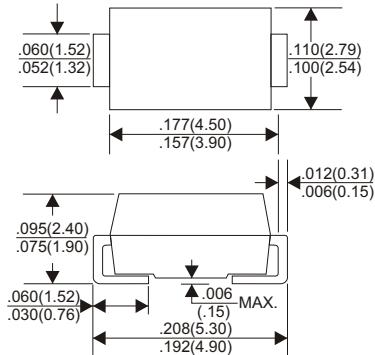

Dimensions in inches and (millimeters)

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS24L	SS26L	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	40	60	V
Maximum RMS voltage	V _{RMS}	28	42	V
Maximum DC Blocking Voltage	V _{DC}	40	60	V
Maximum Average Forward Rectified Current	I _{F(AV)}	2.0		A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50	40	A
Max Instantaneous Forward Voltage at 2 A	V _F	0.46	0.55	V
Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a = 100°C	I _R	0.5 10		mA
Typical Junction Capacitance ¹⁾	C _j	290	130	pF
Operating Junction Temperature Range	T _j	-55 ~ +150		°C
Storage Temperature Range	T _{stg}	-55 ~ +150		°C

1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

RATING AND CHARACTERISTIC CURVES (SS24LTHRU SS26L)

Fig.1 Forward Current Derating Curve

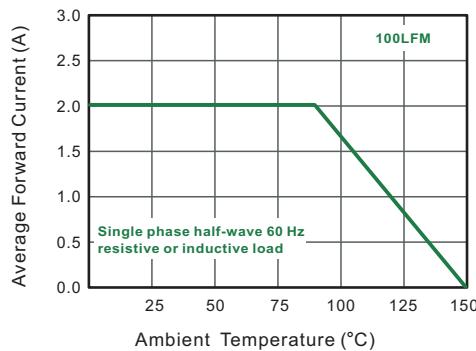


Fig.2 Typical Reverse Characteristics

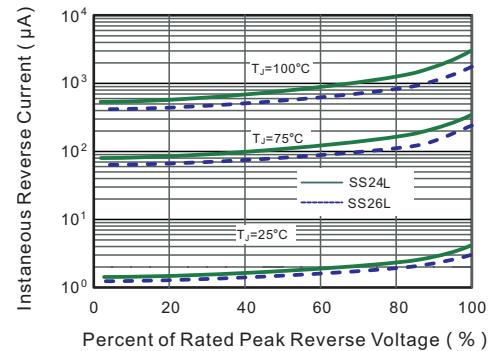


Fig.3 Typical Forward Characteristic

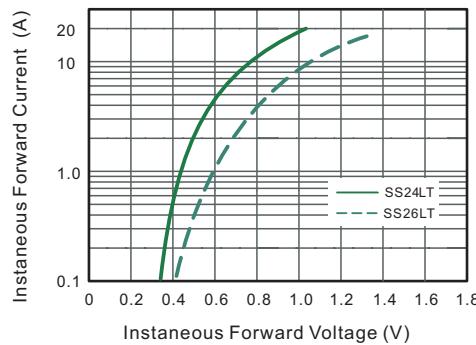


Fig.4 Typical Junction Capacitance

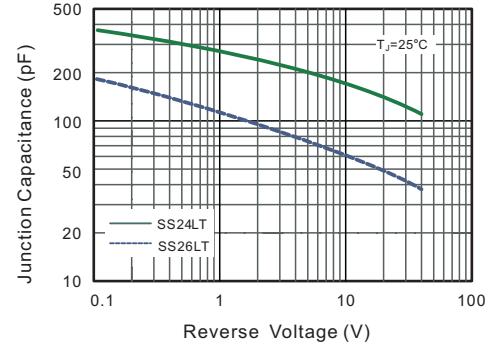


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

