

# BY127M, BY133, EM513

1.0 AMP SILICON RECTIFIERS



## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

## MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.28 grams
- \* Lead Free Finish/RoHS Compliant

## VOLTAGE RANGE

1250 to 1600 Volts

## CURRENT

1.0 Ampere

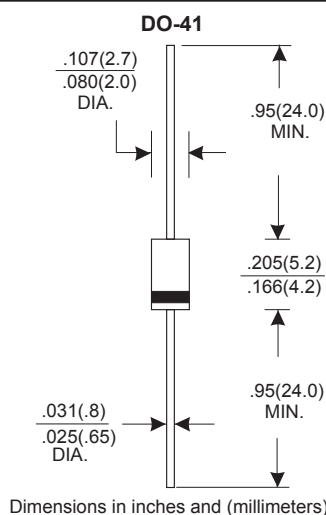

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER   | BY127M     | BY133 | EM513 | UNITS |
|---|------------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage  | 1250       | 1300  | 1600  | V     |
| Maximum RMS Voltage   | 875        | 910   | 1120  | V     |
| Maximum DC Blocking Voltage   | 1250       | 1300  | 1600  | V     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at Ta=75°C                      | 1.0        |       |       | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 30         |       |       | A     |
| Maximum Instantaneous Forward Voltage at 1.0A   | 1.1        |       |       | V     |
| Maximum DC Reverse Current Ta=25°C  | 5.0        |       |       | μA    |
| at Rated DC Blocking Voltage Ta=100°C   | 50         |       |       | μA    |
| Typical Junction Capacitance (Note 1)   | 15         |       |       | pF    |
| Typical Thermal Resistance RθJA (Note 2)  | 50         |       |       | °C/W  |
| Operating and Storage Temperature Range Tj, Tstg  | -65 — +150 |       |       | °C    |

### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance from Junction to Ambient .375" (9.5mm) lead length.

## RATING AND CHARACTERISTIC CURVES (BY127M, BY133, EM513)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

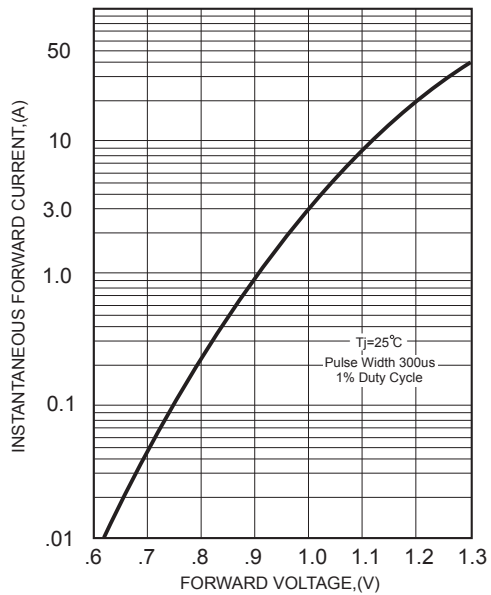


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

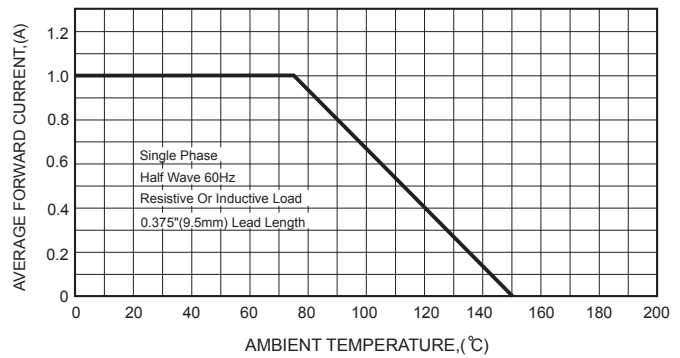


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

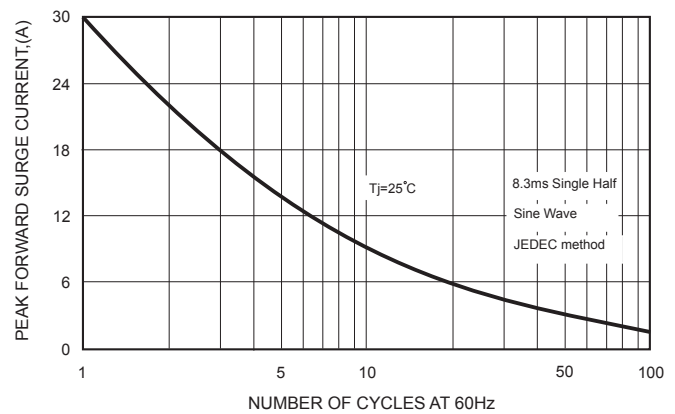


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

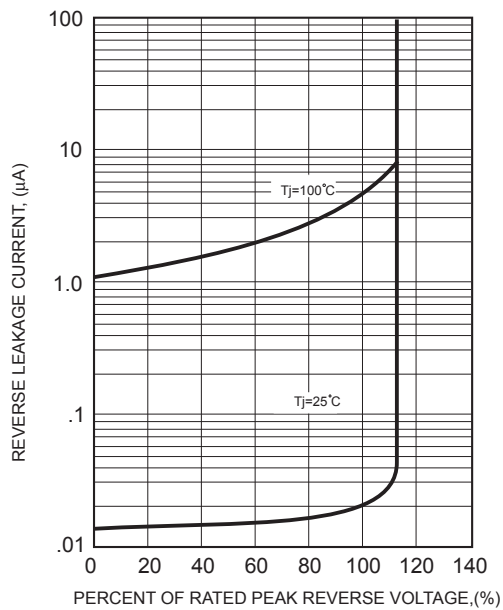


FIG.5-TYPICAL JUNCTION CAPACITANCE

